

ALUMINA BRIGHT PAINT



PRODUCT DESCRIPTION

Alumina Bright Paint is a high-quality aluminium finishing paint. This product is suitable for both interior and exterior surfaces. With a good water and moisture resistance capability, it provides a bright silver metallic finish.

PRODUCT FEATURES

- Excellent durability
- Good water and moisture resistance
- Provides a bright and attractive silver metallic finish
- Easy application by brush, roller or conventional air spray

PHYSICAL DATA

Dry Film Thickness (DFT)	25-35 µm per coat
Wet Film Thickness (WFT)	56-78 µm per coat
Number of Coats	1-2
Finish	Metallic Sheen
Colour Range	Aluminium
Coverage	193.68 sq.ft./L/coat

AVAILABLE PACKS




4 Ltr



1 Ltr



500ml

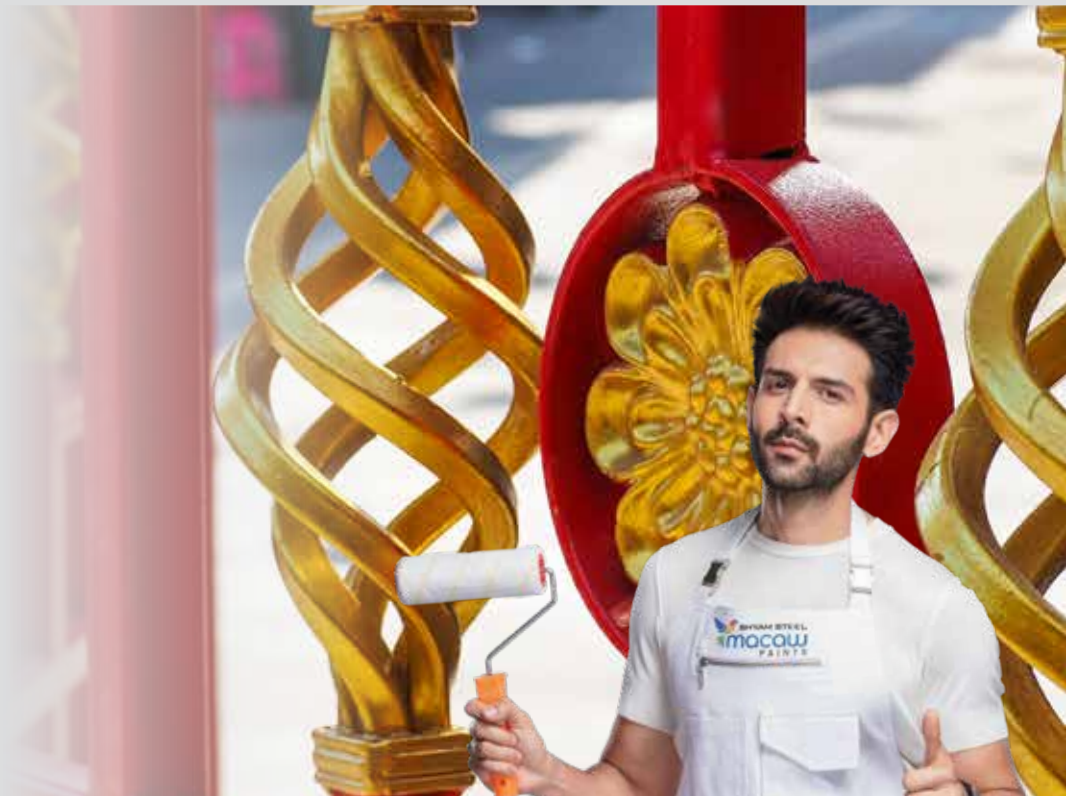

ALUMINA BRIGHT PAINT



DRYING TIME

At 30°C Substrate Temperature- **Surface dry:** 4 hours
Hard Dry: 16 hours
Overcoating Interval: Minimum 24 hours

SURFACE PREPARATION AND APPLICATION



- Before paint application, ensure there is no dirt and dust. Sand the surface with coarse sand/water paper according to the type of surface to remove rust, other loose unwanted particles
- Clean the surface by suitable solvent to remove oil, wax, grease, and any kind of surface contaminations and remove loose rust and mill scale by sanding, grinding, chipping, needle gun or spot blasting to bring them back to a solid edge
- Apply Red Oxide Metal Primer or suitable primer as per the surface condition, and allow minimum 1 hour drying time
- Apply paint when the preferred relative humidity is maximum 90% and the ambient temperature is above 3°C of the dew point temperature
- Alumina Bright Paint can be applied by brush, roller or conventional air spray

ADDITIONAL INFORMATION

Thinner	MTO
Thinning Ratio	5% maximum
Cleaning Solvent	Xylene/MTO
Flash Point	>30°C
Storage requirements	Store in cool, dry area away from direct sunlight
Shelf Life	2 years, if stored as prescribed in a sealed container

PRODUCT USE RESTRICTION

- This product is not suitable for use in immersed conditions
- Do not overcoat this product prematurely as it will result in inadequate curing and performance
- Maintain the recommended overcoating intervals

IMPORTANT NOTES



- Shake the container and stir well before use; do not over dilute
- Keep away from flammable sources
- Keep the container tightly closed after use
- Keep out of reach of children. In case of direct eye contact, rinse thoroughly with clean and warm water and seek medical help, if required
- Store away from edibles

SAFETY & CAUTION

- During application and drying of the primer, ensure good ventilation
- Put on protective clothes, gloves, eye protector and nose pad while painting and rubbing the surface
- Smoking while painting is strictly prohibited
- Do not inhale the vapour

FIRST AID

Eyes	In the event of accidental splashes rinse your eyes with water immediately and seek medical advice
Skin	Wash skin thoroughly with soap and water or approved industrial cleaner
Inhalation	Move to fresh air, loosen collar and keep patient rested
Ingestion	In case of accidental ingestion, do not induce vomiting. Obtain immediate medical attention

LEAD CONTENT DOES NOT EXCEED 90 PARTS PER MILLION

*T&C apply

SSIL Paint Industries Pvt. Ltd.

Premises No. 03-319, DH-6/11, Street No. 319, Action Area-1D, North 24 Parganas, New Town, Kolkata-700156, West Bengal

For feedback/complaints, write to the customer care at the above address or call

☎: 1800 309 4007 | ✉: enquiry@macawpaints.com | 🌐: www.macawpaints.com

A PRODUCT FROM

